


1 2 3 4 5 6

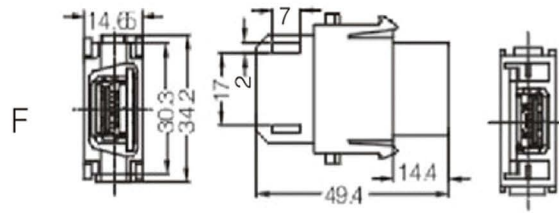

插芯:

- 插针数: 4
- 工作电流: 1A
- 工作电压: 50V
- 额定脉冲电压: 0.8kV
- 污染等级: 3
- 绝缘阻抗:  $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 温度范围:  $-40^{\circ}\text{C} - +85^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数:  $>500$

Technical specification:

Inserts:

- No. of contact: 4
- Working current: 1A
- Operating Voltage: 50V
- Rated impulse voltage: 0.8kV
- Pollution degree: 3
- Insulation resistance:  $>10^{10}\Omega$
- Material: polycarbonate
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles:  $>500$

				表面处理 Finish		-		图号 Drawing No.	-
				材料 Material		-		产品代号 Part Code	HM-USB-F
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date			产品料号 Part No.	2114000201
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn		8.10.2010	标准化 Stand.	-	-	1:1	V1.0		-
审核 Checked		8.10.2010							
工艺 Process	-	-	批准 Approved		8.10.2010			All Dimensions in mm Original Size DIN A 4	
								浙江西霸士电气有限公司	

1 2 3 4 5 6